



PE Polyetylén

PA Polyamid



Materiál je samozhášavý,
odolný proti šíreniu
plameňa
30 sec.

BEZSKRUTKOVÉ SVORKY BS x/z


Vyhovuje
STN EN 60998-2-2

IP 40 / 450 V


PA



30 sec.

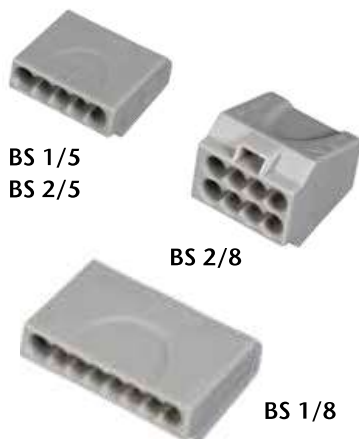


Typ	Prúd (A)	Prierez (mm ²)	Dĺžka odizolovania (mm)	Objednávacie číslo	Balenie (ks)
BS 1/5	17	5 x (0,75 ± 1,5)	11 ± 1	18800132.00	100
BS 1/8		8 x (0,75 ± 1,5)		18800133.00	50
BS 2/2	24	2 x (1 ± 2,5)	11 ± 1	18800134.00	100
BS 2/3		3 x (1 ± 2,5)		18800135.00	100
BS 2/4		4 x (1 ± 2,5)		18801789.00	100
BS 2/5		5 x (1 ± 2,5)		18800136.00	100
BS 2/8		8 x (1 ± 2,5)		18800137.00	50

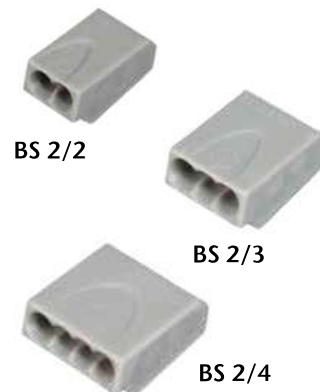


x-1 prierez 0,75±1,5 mm² x-2 prierez 1±2,5 mm² z- počet pólov

HMOŽDINKY H6, H8, H10, H12

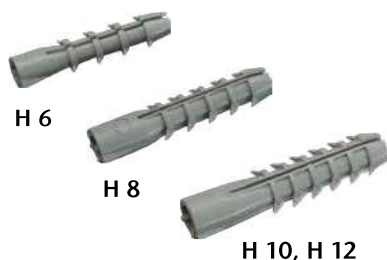


Typ	Objednávacie číslo	Balenie (ks)	A (mm)	Ø otvoru (mm)	Ø skrutky (mm)	Dĺžka skrutky (mm)
H6	10002285.00	200	30	6	2 ÷ 4	15 ÷ 30
H8	10002286.00	200	40	8	3 ÷ 5	20 ÷ 40
H10	10002287.00	200	50	10	4 ÷ 6	25 ÷ 50
H12	10011014.00	200	60	12	4 ÷ 8	40 ÷ 60

PE




KOTVIACA PODLOŽKA SAMOLEPIACA

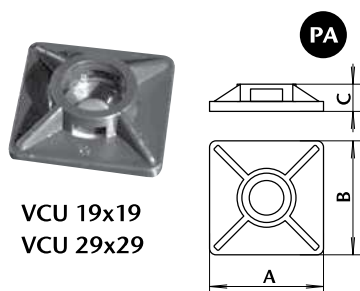


Typ	Objednávacie číslo	Rozmery (mm)	
		A x B	C
VPU 19x19	19300840.00	19x19	3,5
VCU 19x19	19300841.00		
VPU 29x29	19300842.00	29x29	6
VCU 29x29	19300844.00		

VPU - biela, VCU - čierna

SPOJKA PR 10

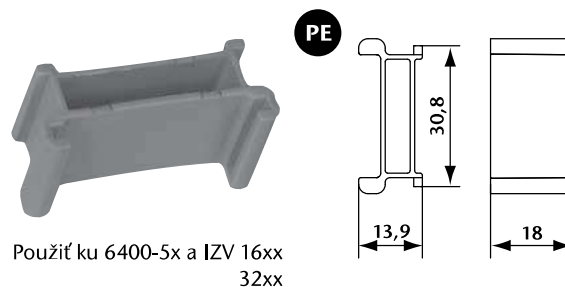

ZATLÁKACIA HMOŽDINKA



KÁBLOVÁ PRÍCHYTKA PRE INTERIÉR

