


MG

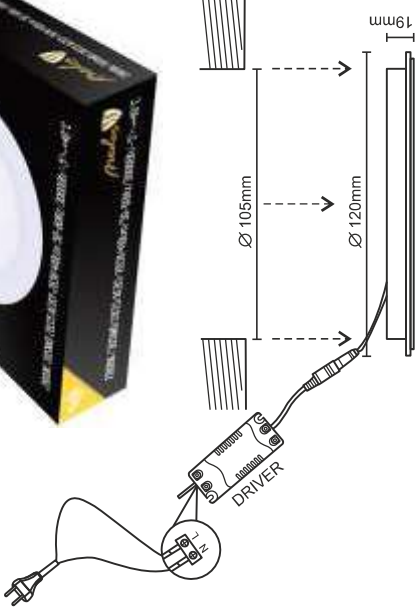

art.n.: LPL111

tip: PR6W/30SMD/2835/2800K

IP20

2800K

410lm

6W  
50W

-5°C  
+40°C

AC  
85-265V

120°

30.000 h

30.000

0% rth

Ra ≥ 80


UV free

Hg free

1/90



MG

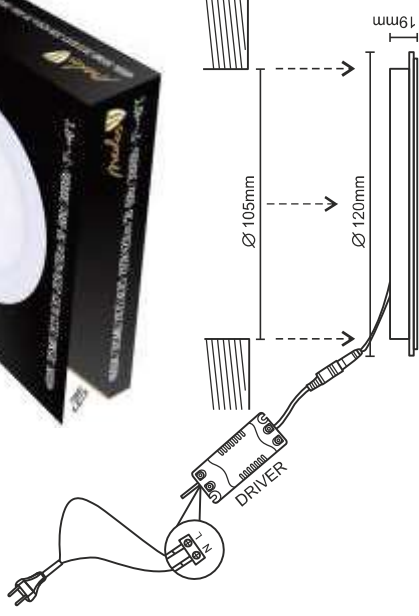

art.n.: LPL121

tip: PR6W/30SMD/2835/4000K

IP20

4000K

420lm

6W  
50W

-5°C  
+40°C

AC  
85-265V

120°

30.000 h

30.000


0% rth

Ra ≥ 80

UV free



Hg free

1/90





18W

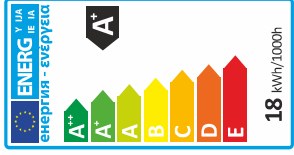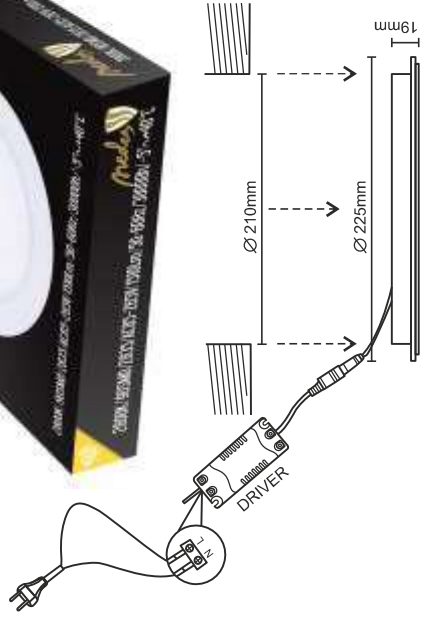

art.n.: LPL114

tup: PR18W/90SMD/2835/2800K

IP20

2800K

1510 Lm

18W  
Ø130W

-5°C  
+40°C

AC  
85-265V

120°

30.000 h

30.000

100%

Ra ≥ 80

UV free



Hg free

1/20



715850401901415

18W

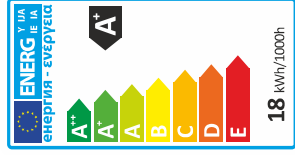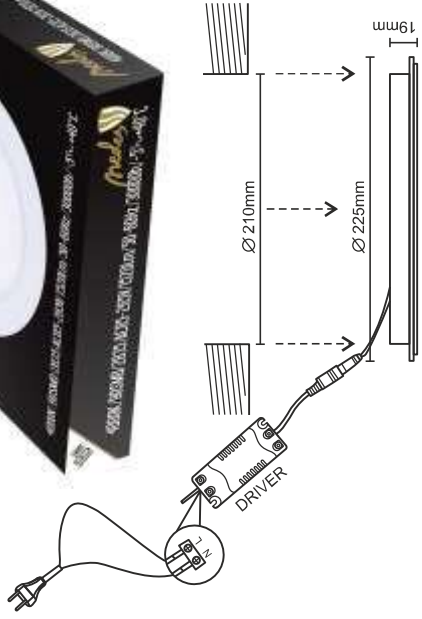

art.n.: LPL124

tup: PR18W/90SMD/2835/4000K

IP20

4000K

1520 Lm

18W  
Ø130W

-5°C  
+40°C

AC  
85-265V

120°

30.000 h

30.000

100%

Ra ≥ 80

UV free

Hg free

1/20



715850401901422

