

art.n.: LGL514
tip: GL501/2800K

IP67

2800K

210lm

-30°C
+65°C

AC
85-264V

30°

50.000 h

30.000


9% 100%

Ra ≥ 80

UV free

Hg free

1/5/30

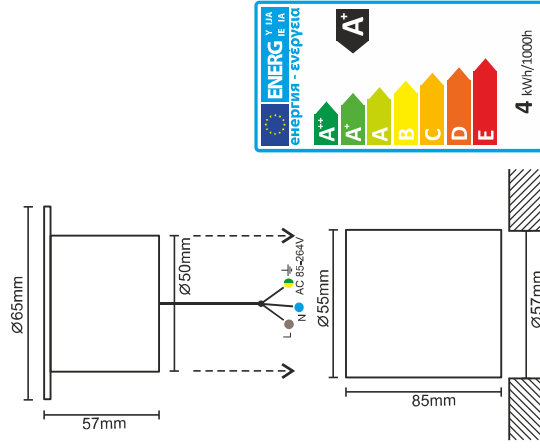

art.n.: LGL524
tip: GL501/4000K

IP67

4000K

220lm

-30°C
+65°C

AC
85-264V

30°

50.000 h

30.000

9% 100%

Ra ≥ 80




UV free

Hg free

1/5/30



4W


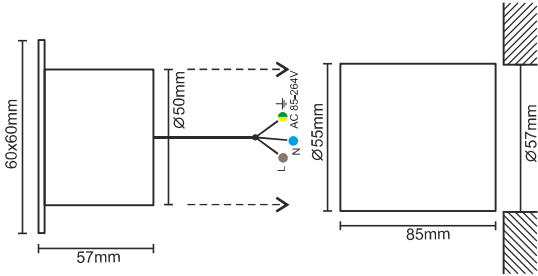


IP67
2800K
210lm
-30°C
+65°C
AC 85-264V
100%
30°
50,000 h
30,000
9% 100%Ra ≥ 80
UV free
Hg free

art.nr.: LGL514S
tip: GL511/2800K



4W

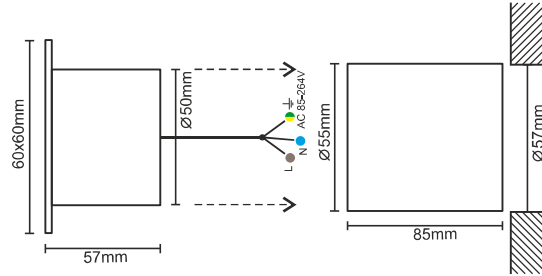

IP67
4000K
220lm
-30°C
+65°C
AC 85-264V
100%
30°
50,000 h
30,000
9% 100%Ra ≥ 80
UV free
Hg free

art.nr.: LGL524S
tip: GL511/4000K

