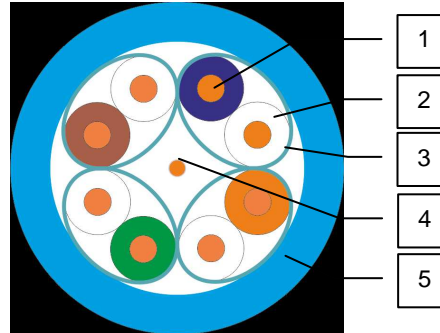


DESIGN

- 1) Core: Solid annealed copper \varnothing 0,565 mm (\pm 0,005 mm)
- 2) Insulation: Skin-Foam-Skin PE \varnothing 1,35 mm
- 3) Shielding: Individual Al/Pet foil (metal outside)
- 4) Drain wire: Solid tinned copper \varnothing 0,4 mm
- 5) Jacket: LSZH, nominal cable \varnothing 6,5 mm


APPLICATION

PBX, V.11, X.21, ISDN, Ethernet (10Base-T), ATM-25/52/155 Mbit/s, 100VG-AnyLAN, Fast Ethernet (100BASE-TX), Token Ring 16/100 Mbit/s, Gigabit Ethernet (1000BASE-T), Firewire 100 Mbit/s, 10 Gigabit Ethernet (10GBASE-T), ATM LAN 1,2 Gbit/s

INSTALLATION AND OPERATION CONDITIONS

For stationary installation inside buildings, stations, structures and equipment in conditions of heightened electromagnetic impacts. Operated on frequencies up to 500 MHz.

COMPLIANCE WITH THE REQUIREMENTS

ISO/IEC 11801:2002, EN 50173-1:2002, ANSI/TIA 568-C.2, IEC 61156-5, IEC 60332-1, IEC 61034-1, IEC 60754-2

MECHANICAL CHARACTERISTICS

Temperature range:

During installation -10 °C ... +60 °C

After installation -20 °C ... +60 °C

Bending radius:

During installation \geq 10 cable diameters

After installation \geq 4 cable diameters

Tensile stress \leq 85 N

ELECTRICAL CHARACTERISTICS AT 20 °C

Parameter	Unit	Value
Capacitance	pF/m	\leq 56
Direct current resistance	Ohm/km	\leq 84
Insulation resistance	GOhm/km	\geq 5
Resistance unbalance	%	2
Signal propagation velocity	s	0,80
Propagation delay	ns/100 m	\leq 534+36/ \sqrt{f}
Delay shift on the frequency 100 MHz	ns/100 m	\leq 30
Characteristic impedance in the frequency range of: 1-100 MHz 100-250 MHz 251-500 MHz	Ohm	100 \pm 15 100 \pm 22 100 \pm 25
Test voltage between cores, (DC, 2 s)	kV	2,5

Frequency, MHz	1	4	10	16	20	31,25	62,5	100	125	200	250	300	400	500
Attenuation, dB, max	2,1	3,8	5,9	7,5	8,4	10,5	15	19,1	21,5	27,6	31	34	40	45
NEXT, dB, min	75	66	60	57	56	53	48	45	44	41	39	38	36	35
PS NEXT, dB, min	72	63	57	54	53	50	45	42	41	38	36	35	33	32
ELFEXT, dB, min	68	56	48	44	42	38	32	28	26	22	20	18	16	14
PS ELFEXT, dB, min	65	53	45	41	39	35	29	25	23	19	17	15	13	11
RL, dB, min	20	23	25	25	25	23,6	21,5	20,1	19,4	18	17	17	17	17

IEC 61156-5, values lower than 4 MHz are given for information only

ORDER INFORMATION

P/N	Cable type	Packing	Weight, kg/km
7935044	KPpVong-HF-VPE (500) 4x2x0,56 (U/FTP-cat.6A LSOH)	plywood reel, 305/500/1000 m	47,5

